

# SKM55U-3GB Datasheet

## Beidou/GPS Module

### Document Information

<b>Title</b>	SKM55U-3GB Ultra High Sensitivity and Low Power GPS/BD Receiver Module Datasheet	
<b>Document type</b>	Datasheet	
<b>Document number</b>	SL-23040326	
<b>Revision and date</b>	V1.01	28-Apr-2023
<b>Disclosure restriction</b>	External public	

**Revision History:**

<b>Revision</b>	<b>Description</b>	<b>Approved</b>	<b>Date</b>
V1.01	Initial Release	George	2023/04/28

SKYLAB reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of SKYLAB is strictly prohibited.

The information contained herein is provided “as is” and SKYLAB assumes no liability for the use of the information. No warranty, either express or implied, is given, including but not limited, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by SKYLAB at any time. For most recent documents, visit [www.skylab.com.cn](http://www.skylab.com.cn).

Copyright © 2023, Skylab M&C Technology Co., Ltd.

SKYLAB® is a registered trademark of Skylab M&C Technology Co., Ltd in China

## 目录

General Description .....	4
Applications .....	4
Features .....	4
Pin Assignment .....	5
Performance Specification .....	5
Hardware Interfaces Configuration .....	7
Pin Description .....	7
Mechanical Specification .....	8
Molex Connector .....	8
Ordering Information .....	8
Software Protocol .....	8
NMEA 0183 Protocol .....	8
GGA-Global Positioning System Fixed Data .....	9
GLL-Geographic Position – Latitude/Longitude .....	10
GSA-GNSS DOP and Active Satellites .....	11
GSV-GNSS Satellites in View .....	12
RMC-Recommended Minimum Specific GNSS Data .....	13
VTG-Course Over Ground and Ground Speed .....	14
ZDA-Date and Time .....	14
NMEA CMD List .....	15

## General Description

The SKYLAB SKM55U-3GB Series with embedded GPS/BD antenna enables high performance navigation in the most stringent applications and solid fix even in harsh GPS/BD visibility environments.

It is based on the high performance single-chip architecture, Its  $-165\text{dBm}$  tracking sensitivity extends positioning coverage into place like urban canyons and dense foliage environment where the BD/GPS was not possible before. The UART connector design is the easiest and convenient solution to communication with other electronic equipment.



**Figure 1: SKM55U-3GB Top View**

说明：与旧版 SKM55 产品相比，本次产品外壳丝印改为 GNSS,去掉 LED 灯，线径改为 3.0mm。

Description: Compared with the old SKM 55 product, the shell screen of this product is changed to GNSS, the LED lamp is removed, and the wire diameter is changed to 3.0mm.

## Applications


- ◆ LBS (Location Based Service)
- ◆ PND (Portable Navigation Device)
- ◆ Vehicle navigation system
- ◆ Mobile phone

## Features

- ◆ BD/GPS/GLONASS/GALILEO/SBAS/ QZSS receiver
- ◆ Ultra high sensitivity:  $-161\text{dBm}$

- ◆ Extremely fast TTFB at low signal level
- ◆ Ultra low power consumption
- ◆ SBAS: WAAS, EGNOS, MSAS
- ◆ Operating temperature range: -40 to 85°C
- ◆ Protocols: NMEA, RTCM
- ◆ RoHS compliance (Lead-free)
- ◆ FCC,CE compliance
- ◆ Tiny form factor : 46 \* 45 \* 15mm

## Pin Assignment

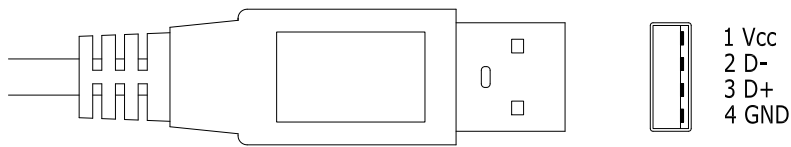

**USB Connector**

**Figure 2: SKM55U-3GB Series Pin Package**

## Performance Specification

Parameter	Specification	
<b>GPS/BD receiver</b>		
Receiver Type	BD/GPS/GLONASS/GALILEO; 56 Channels engine GPS/QZSS L1C/A SBAS: WAAS, EGNOS, MSAS GLONASS L1 FDMA	
Sensitivity	Tracking	-161dBm
	Acquisition	-148dBm
Accuracy	Position	2.5m CEP50 without SA(Typical Open Sky)
	Velocity	0.1m/s without SA
	Timing (PPS)	30ns RMS

Acquisition Time	Cold Start	29s
	Warm Start	28s
	Hot Start	1s
	Re-Acquisition	5s
Power Consumption	Tracking	25mA @3.3V Typical
	Acquisition	28mA @3.3V
	Sleep/Standby	TBD
Navigation Data Update Rate	Max 10Hz	Default 1Hz
Operational Limits	Altitude	Max 50,000m
	Velocity	Max 500m/s
	Acceleration	Less than 4g
<b>Antenna Specifications</b>		
Outline Dimension	25 x 25 x 4.0 mm	
Impedance	50 Ω	
Axial Ratio	3 dB max	
Polarization	RHCP	
<b>Mechanical requirements</b>		
Dimension	46*45*15mm	
Weight	90g	
Power consumption		
VCC	3.3V~5V	
Current	50mA(typical)	
<b>Environment</b>		
Operating temperature	-40 ~ +85 °C (w/o backup battery)	
Storage temperature	-40 ~ +125 °C	
Humidity	≅ 95%	

## Hardware Interfaces Configuration

**Power Supply:** Regulated power for the SKM55U-3GB series is required. The input voltage Vcc should be 3.3V~5V, current is no less than 150mA. Suitable decoupling must be provided by external decoupling circuitry(10uF and 1uF). It can reduce the Noise from power supply and increase power stability.

**UART Ports:** The SKM55U-3GB series supports one full duplex serial channels UART. The serial connections are at 2.85V LVTTTL logic levels, if need different voltage levels, use appropriate level shifters. the data format is however fixed: X, N, 8, 1, i.e. X baud rate, no parity, eight data bits and one stop bit, no other data formats are supported, LSB is sent first. The modules default baud rate is set up 9600bps.

**USB Ports:** The SKM55U-GPS series uses single-chip USB to UART bridge, It is a USB 2.0 compliant full-speed device with integrated transceiver. Before using it, please install the appropriate driver.

## Pin Description

Pin No.	Pin name	I/O	Description	Remark
<b>USB Port (USB Connector)</b>				
1	VCC	P	USB Power Supply	5V
2	D-	I\O	Data-	
3	D+	I\O	Data+	
4	GND	G	USB Power Supply	Reference Ground

## Mechanical Specification

### Molex Connector

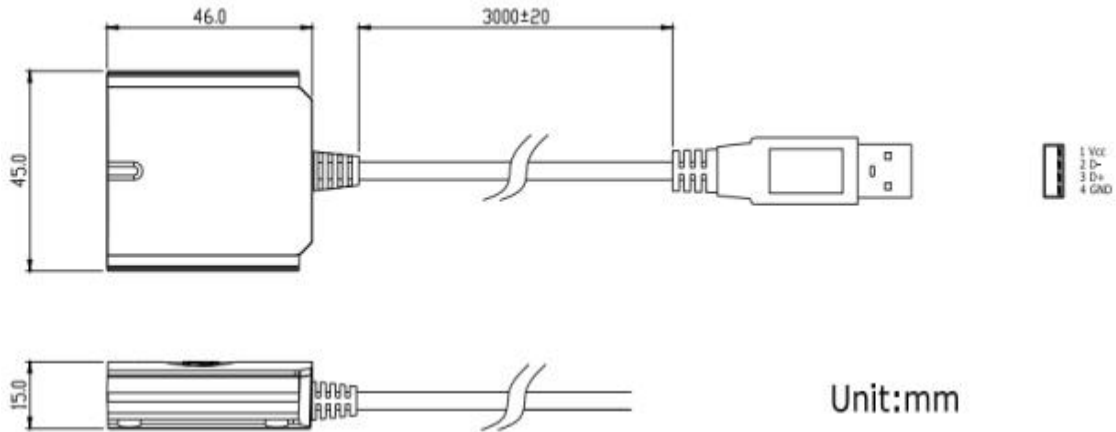


Figure 3: SKM55U-3GB Series Connector

## Ordering Information

Ports	USB
Electrical level	SKM55U-3GB
USB	SKM55U-3GB

## Software Protocol

### NMEA 0183 Protocol

The NMEA protocol is an ASCII-based protocol, Records start with a \$ and with carriage return/line feed. BD/GPS specific messages all start with \$GNxxx where xxx is a three-letter identifier of the message data that follows. NMEA messages have a checksum, which allows detection of corrupted data transfers.

The Skylab SKM55U-3GB supports the following NMEA-0183 messages: GGA, GLL, GSA, GSV, RMC VTG, ZDA. The module default NMEA-0183 output is set up GGA、GSA、RMC、GSV , and default baud rate is set up 9600bps.

Table 1: NMEA-0183 Output Messages

NMEA Record	Description	Default
-------------	-------------	---------



GNGGA	Global positioning system fixed data	Y
GNGLL	Geographic position—latitude/longitude	N
GPGSA	GPS DOP and active satellites for GPS	Y
BDGSA	Beidou DOP and active satellites for BD	Y
GPGSV	GPS satellites in view for GPS	Y
BDGSV	Beidou satellites in view for BD	Y
GNRMC	Recommended minimum specific GNSS data	Y
GNVTG	Course over ground and ground speed	N
GNZDA	Date and Time	N

## GGA-Global Positioning System Fixed Data

This sentence contains the position, time and quality of the navigation fix.

See RMC for Fix Status, Fix Mode, Fix Date, Speed, and True Course.

See GSA for Fix Type, PDOP, and VDOP.

[\\$GNGGA,013134.000,2232.1711,N,11401.1946,E,1,9,1.17,45.2,M,-2.2,M,,\\*70](#)

Table 2: GGA Data Format

Name	Example	Units	Description
Message ID	\$GNGGA		GGA protocol header
UTC Position	013134.000		hhmmss.sss
Latitude	2232.1711		ddmm.mmmm
N/S indicator	N		N=north or S=south
Longitude	11401.1946		dddmm.mmmm
E/W Indicator	E		E=east or W=west
Position Fix Indicator	1		See Table 2-1
Satellites Used	9		Range 0 to 12
HDOP	1.17		Horizontal Dilution of Precision
MSL Altitude	45.2	meters	Altitude (referenced to the Ellipsoid)

AltUnit	M	meters	Altitude Unit
GeoSep	-2.2	meters	Geoidal Separation
GeoSepUnit	M	meters	Geoidal Separation Unit
Age of Diff.Corr.	<Null>	second	Null fields when it is not Used
Diff.Ref.Station ID	<Null>		Null fields when it is not Used
Checksum	*74		
EOL	<CR> <LF>		End of message termination

Table 2-1: Position Fix Indicators

Value	Description
0	Fix not available or invalid
1	SPS Mode, fix valid
2	Differential GPS, SPS Mode, fix valid
3	PPS Mode, fix valid

## GLL-Geographic Position – Latitude/Longitude

This sentence contains the fix latitude and longitude.

[\\$GNGLL,2232.1799,N,11401.1824,E,021513.000,A,A\\*50](#)

Table 3: GLL Data Format

Name	Example	Units	Description
Message ID	\$GNGLL		GLL protocol header
Latitude	2232.1799		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	11401.1824		dddmm.mmmm
E/W Indicator	E		E=east or W=west
UTC Position	021513.000		hhmmss.sss
Fix Status	A		A=data valid or V=data not valid
Fix Mode	A		A=autonomous, N = No fix, D=DGPS, E=DR

Checksum	*50		
EOL	<CR> <LF>		End of message termination

### GSA-GNSS DOP and Active Satellites

This sentence contains the mode of operation, type of fix, PRNs of the satellites used in the solution as well as PDOP, HDOP and VDOP.

\$GPGSA,A,3,25,20,32,29,31,16,,,,,,,,,1.54,1.26,0.88\*13

GPS GSA message: ID1 to ID32 for GPS satellites

\$BDGSA,A,3,10,,,,,,,,,,,,,1.54,1.26,0.88\*17

BD message: ID1 to ID30 for BD satellites

Table 4: GSA Data Format

Name	Example	Units	Description
Message	\$GPGSA		GSA protocol header
Mode 1	A		See Table 4-2
Mode 2	3		See Table 4-1
ID of satellite used	28		Sv on Channel 1
ID of satellite used	20		Sv on Channel 2
...	...		...
ID of satellite used	<Null>		Sv on Channel 12 (Null fields when it is not Used)
PDOP	1.14		Position Dilution of Precision
HDOP	0.75		Horizontal Dilution of Precision
VDOP	0.85		Vertical Dilution of Precision
Checksum	*2F		
EOL	<CR> <LF>		End of message termination

Table 4-1: Mode 2

Value	Description
-------	-------------

1	Fix not available
2	2D Fix
3	3D Fix

Table 4-2: Mode 1

Value	Description
M	Manual-forced to operate in 2D or 3D mode
A	Automatic-allowed to automatically switch 2D/3D

### GSV-GNSS Satellites in View

This sentence contains the PRNs, azimuth, elevation, and signal strength of all satellites in view.

\$GPGSV,4,1,13,14,53,105,,16,46,228,27,31,46,011,28,32,39,289,23\*72

\$GPGSV,4,2,13,29,23,067,20,06,17,183,13,22,16,172,17,20,15,307,29\*70

\$GPGSV,4,3,13,27,08,188,17,25,07,039,33,03,04,197,17,33,,,\*42

\$GPGSV,4,4,13,193,,,\*40

GPS GSV message: ID1 to ID32 for GPS satellites

\$BDGSV,1,1,03,10,46,329,31,08,43,161,,09,40,217,\*52

BD GSV message: ID1 to ID30 for BD satellites

Table 5: GSV Data Format

Name	Example	Units	Description
Message ID	\$GPGSV		GSV protocol header
Number of Message	4		Total number of GSV sentences
Message Number	1		Sentence number of the total
Satellites in View	13		Number of satellites in view
Satellite ID	207		Channel 1
Elevation	79	degrees	Channel 1(Range 00 to 90)
Azinmuth	304	degrees	Channel 1(Range 000 to 359)
SNR(C/NO)	34	dB-Hz	Channel 1(Range 00 to 99, null when not

			tracking)
...			...
Satellite ID	210		Channel 4(Range 01 to 32)
Elevation	60	degrees	Channel 4(Range 00 to 90)
Azimuth	245	degrees	Channel 4(Range 000 to 359)
SNR(C/NO)	28	dB-Hz	Channel 4(Range 00 to 99, null when not tracking)
Checksum	*41		
EOL	<CR> <LF>		End of message termination

Depending on the number of satellites tracked multiple messages of GSV data may be required.

### RMC-Recommended Minimum Specific GNSS Data

This sentence contains the recommended minimum fix information.

See GGA for Fix Quality, Sats Used, HDOP, Altitude, Geoidal Separation, and DGPS data.

See GSA for Fix Type, PDOP and VDOP.

[\\$GNRMC,013133.000,A,2232.1711,N,11401.1946,E,0.017,0.00,040513,,A\\*4E](#)

Table 6: RMC Data Format

Name	Example	Units	Description
Message ID	\$GNRMC		RMC protocol header
UTS Position	013133.000		hhmmss.sss
Status	A		A=data valid or V=data not valid
Latitude	2232.1711		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	11401.1946		dddmm.mmmm
E/W Indicator	E		E=east or W=west
Speed Over Ground	0.017	Knots	
Course Over Ground	0.00	Degrees	True Course

Date(UTC)	040513		ddmmyy
Magnetic variation	<Null>	Degrees	Null fields when it is not Used
Magnetic Variation Direction	<Null>		E=east or W=west (Null fields when it is not Used)
Fix Mode	A		A=autonomous, N = No fix, D=DGPS, E=DR
Checksum	*6B		
EOL	<CR> <LF>		End of message termination

## VTG-Course Over Ground and Ground Speed

This sentence contains the course and speed of the navigation solution.

\$GNVTG,148.81,T,,M,0.13,N,0.24,K,A\*3D

Table 7: VTG Data Format

Name	Example	Units	Description
Message ID	\$GNVTG		VTG protocol header
Tcourse	148.81	Degrees	True Course
Reference	T		T = True
Mcourse	<Null>	Degrees	Magnetic Course (Null fields when it is not Used)
Reference	M		M = Magnetic (Null fields when it is not Used)
Speed over ground	0.13	Knots	Nautical Miles per Hour
Units	N		Knots
Speed over ground	0.24	Km/hr	in Kilometers per Hour
Units	K		Kilometer per hour
Mode	A		A=Autonomous, N=No fix, D=DGPS, E=DR
Checksum	*3D		
EOL	<CR> <LF>		End of message termination

## ZDA-Date and Time

This sentence contains UTC date & time, and local time zone offset information.

\$GNZDA,023345.000,10,04,2010,,\*50

Table 8: ZDA Data Format

Name	Example	Units	Description
Message ID	\$GNZDA		ZDA protocol header
UTC Time	023345.000		hhmmss.sss
Day	10		UTC time: day (01 ... 31) dd
Month	04		UTC time: month (01 ... 12) mm
Year	2010		UTC time: year (4 digit year) yyyy
local zone hours	<null>		Local Time Zone Offset Hours (Null fields when it is not Used)
local zone minutes	<null>		Local Time Zone Offset Minutes (Null fields when it is not Used)
Checksum	*50		
EOL	<CR> <LF>		End of message termination

## NMEA CMD List

Table 9: NMEA CMD List

NMEA CMD TYPE	NMEA CMD Example:
Hot Restart	\$PMTK101*32<CR><LF>
Warm Restart	\$PMTK102*31<CR><LF>
Cold Restart	\$PMTK103*30<CR><LF>
Full Cold Restart	\$PMTK104*37<CR><LF>
port baudrate	\$PMTK251,38400*27<CR><LF>
MODE SET	
BD only mode	\$PMTK353,0,0,0,0,1
GPS only mode	\$PMTK353,1,0,0,0,0
GPS + BD o mixed mode	\$PMTK353,1,0,0,0,1

## Contact Information

**Skylab M&C Technology Co., Ltd.**

深圳市天工测控技术有限公司

**Address:** 6th Floor, No.9 Building, Lijincheng Scientific & Technical park, Gongye East Road, Longhua District, Shenzhen, Guangdong, China

**Phone:** 86-755 8340 8210 (Sales Support)

**Phone:** 86-755 8340 8510 (Technical Support)

**Fax:** 86-755-8340 8560

**E-Mail:** sales1@skylab.com.cn

**Website:** www.skylab.com.cn      www.skylabmodule.com