

SKA01C25-30RPSJ28

High-Gain External Antenna

Document Information

Title	SKA01C25-30RPSJ28 High-Gain External Antenna
Type	Datasheet
Code	SL-24060424
Version	V1.02 (25-July-2025)
Confidentiality Level	Public

Revision History

Version	Description	Writer	Date
V1.01	Original version	Lena	20240607
V1.02	Update parameters	Taylor	20250725

SKYLAB reserves all rights to this document and its information. SKYLAB owns all intellectual properties concerning products, names, logos, and designs in the document. Copying, using, modification, or disclosure of all or part of the document to third parties without SKYLAB's permission is prohibited.

SKYLAB assumes no liability for the use of the information contained in this document. No explicit or implicit warranties are provided, including, but not limited to, the precision, correctness, reliability, and suitability of the information. SKYLAB reserves the right to revise this document at any time. The latest update can be obtained from www.skylab.com.cn.

Copyright © 2025, Skylab M&C Technology Co., Ltd

SKYLAB® is a registered trademark of Skylab M&C Technology Co., Ltd. in China.

Table of Contents

Table of Contents	3
1 Overview	4
2 Product Appearance	4
3 Operating Conditions	4
4 Storage Conditions	4
5 GPS/BeiDou Antenna Specifications	4
6 GPS/BeiDou Amplifier Specifications	5
7 Environmental Tests	5
8 Product Photos	6
9 外形结构图	7
10 Contact Information	8

1 Overview

The function of a GPS receiving antenna is to convert the electromagnetic wave energy of the radio signals from satellites into electrical power that can be processed by the receiver's electronic components.

Our GPS antenna consists of a ceramic antenna element and an active amplifier. It is enclosed in a plastic shell, offering waterproof and moisture-resistant properties. The product is compact in size, with a magnet installed at the bottom for easy installation and use.

2 Product Appearance

Dimensions	50*38*16.5mm	Mounting method	Adhesive
Weight	<100 g	Connector Type	SMA female
Shell color	Black	Cable	RG174, 3meters

3 Operating Conditions

Temperature: -40℃~+85℃

Humidity: 95 % ~ 100 %

4 Storage Conditions

Temperature: -40℃~+85℃

Humidity: 95 % ~ 100 %

5 GPS/BeiDou Antenna Specifications

NO.	Item	Specification	Post-Environmental Tolerance*
1	Receiving frequency range (MHz)	1550-1610 (MHz)	±2.5 (MHz)
2	Center frequency (with 30×30 mm ² ground plane)	1568 (MHz)	±25 (MHz)
3	Bandwidth (Return Loss ≤ -10 dB)	≥15 (MHz)	±8 (MHz)
4	V.S.W.R (at center frequency)	≤1.5	±0.5
5	Gain at zenith (with 70×70 mm ² ground plane)	3.5	±0.5
6	Axial ratio (with 70×70 mm ² ground plane)	3.0dB	±0.2
7	Polarization	Right-hand circular polarization	----

8	Characteristic impedance	50	----
9	Frequency temperature coefficient	0±10	----

***Post-Environmental Tolerance: allowable additional deviation after environmental testing.**

6 GPS/BeiDou Amplifier Specifications

NO.	Item	Specification
1	Frequency range	1550-1610 (MHz)
2	Amplifier gain	28dB±2dB
3	V.S.W.R	<1.5
4	Noise figure	≤1.5dB
5	DC voltage	2.5-5V
6	DC current	≤10mA

7 Environmental Tests

1. High Temperature Test: Placed in a dry oven at 80℃ for 48 hours. No deformation observed. After drying and placing at room temperature for 24 hours, no oxidation was found.

2. Low Temperature Test: Placed in a freezer at -40℃ for 48 hours. No deformation observed, no oxidation or rust after returning to room temperature.

NO.	Performance (Normal)	Performance (High Temp.)	Performance (Low Temp.)
1	Amplifier Gain: 28dB±2	±2	±2
2	V.S.W.R: <1.5	±0.1	±0.3
3	Noise figure: ≤1.5dB	±0.1	±0.1


3. Salt Spray Test

Test quantity	Suspension method	Test parameters	Result	Conclusion
2	30° hanging, cut edge covered with 3M tape	Dust-free environment, atmospheric pressure 80 Pa Solution pH: 6.9 Salt solution concentration: 42 g sea salt per liter of water at 35℃ Density: 1.0366 After testing, rinse with 32℃ flowing pure water and blow dry.	No oxidation or corrosion observed.	The product demonstrates excellent anti-oxidation and corrosion resistance.

8 Product Photos



9 Dimensional Drawing

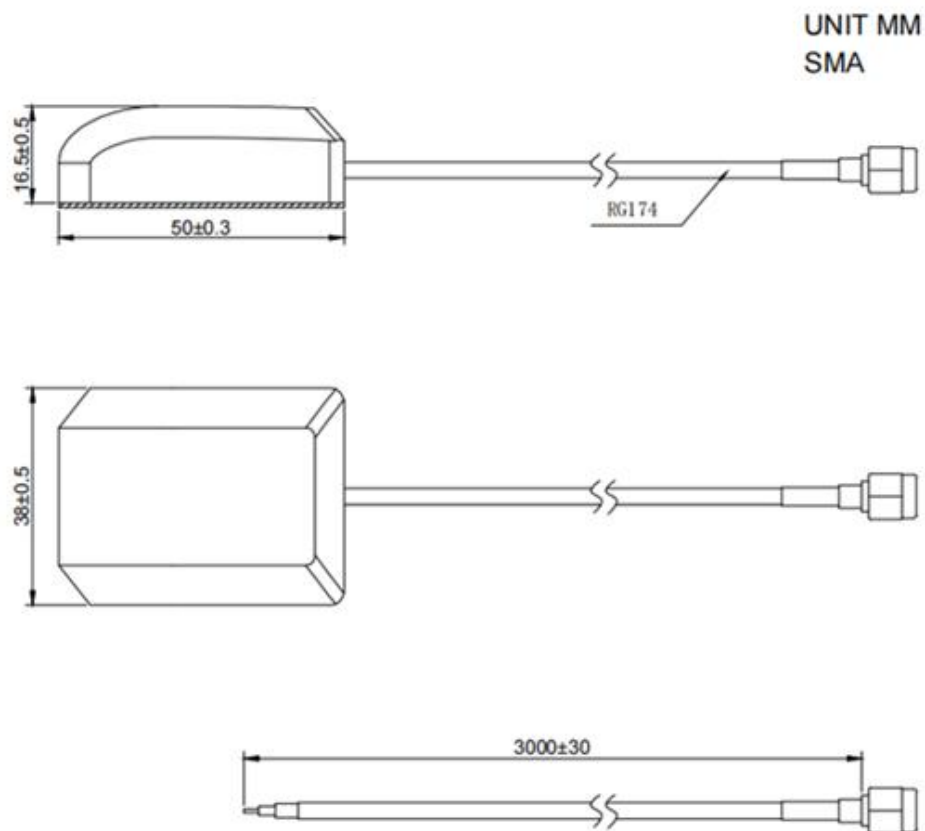

Tolerance:

- X = ± 2 mm
- X.X = ± 0.3 mm
- X.XX = ± 0.05 mm

Units: mm

10 Contact Information

Skylab M&C Technology Co., Ltd

Address: 11th Floor, Building 6, Hongchuang Science and Technology Center, Fucheng Street, Longhua District, Shenzhen, Guangdong, China.

Phone: 86-0755 8340 8210 (Sales Support)

E-Mail: sales1@skylab.com.cn

Website: www.skylab.com.cn www.skylabmodule.com